

# 产品选型手册

Product Selection Manual



高新技术企业 规模以上企业  
High-Tech Enterprises, Enterprises Above Designated Size

一站式智能贴标机及自动化解决方案  
Step Intelligent Labeling Machine&Automation Solutions



## 展厅展示

### Machinery Exhibition Hall



# 半自动圆瓶贴标机 (型号·T801)

## Semi-Automatic Round Bottle Labeling Machine Model T801



### | 适用产品 | Applicable Products



### | 基本用途 | Basic Use

适用于各种规格的圆柱形物体贴标, 小锥度圆瓶贴标, 如木糖醇、化妆品圆瓶、酒瓶等。可实现全周/半周贴标、圆周正背面贴标, 正背标间距可任意调整。广泛应用于食品、化妆品、化工、酿酒、医药等行业。可选配圆周定位检测装置, 实现圆周定位定点贴标。可选配色带打码机和喷码机, 贴标同时打印生产批号, 生产日期, 有效期至等信息, 贴标, 打码一步完成, 大大提高生产效率。

Suitable for all kinds of cylindrical objects labeling, small taper round bottle labeling, such as xylitol, cosmetics round bottles, wine bottles, etc. Can achieve wrap around labeling, front and back labeling, label's distance can be adjusted.

Widely used in food, cosmetics, chemical industry, vintage, medicine and other industries.

Optional positioning detection function by which you can label to specified location in the circumferential surface.

Optional ribbon coding machine and hot stamp printer, can be added to the labeler head, can print MFG, EXP and LOT on labels at the same time while labeling, greatly improve production efficiency.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数, 其他特殊要求和功能, 可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	±0.5mm (不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	15-30件/分钟 (与产品尺寸有关)
<b>适用产品直径</b> Applicable for product diameter	φ10mm ~ φ150mm
<b>适用标签尺寸</b> Applicable Label Size	长度: 20mm ~ 300mm 底纸宽度: 20mm ~ 230mm
<b>整机尺寸</b> Device Dimensions	约913mm × 495mm × 502mm (长 × 宽 × 高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约34Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ280mm
<b>电压</b> Applicable Power Supply	220V



# 半自动平面贴标机 (型号-T802)

Semi-Automatic Plane Labeling Machine  
Model -T802



## 适用产品 | Applicable Products



**基本用途 |** 应用吸贴方法贴标, 实现在各种工件的平面上贴标, 如化妆品扁瓶、包装盒、塑料盖贴标等。更改覆标机构, 可适用于不平整面贴标, 如凹平面、圆弧面的贴标等。更改治具, 可适用于各种不规则工件的贴标。选配色带打码机或喷码机, 在标签上打印生产日期和批号, 实现打码-贴标一体化。  
Apply the method of sucking to label, To achieve labeling on all kinds of workpieces' plane surface, such as cosmetic flat bottle, packaging box, plastic cover labeling, etc. modifying the labeling head, can be used for labeling on uneven surface, such as concave plane, circular arc surface labeling, etc.  
Mould is customized to suit for various irregular workpieces labeling.  
Optional ribbon coding machine and hot stamp printer, can be added to the labeler head, can print MFG, EXP and LOT on labels at the same time while labeling.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数, 其他特殊要求和功能, 可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	±0.5mm (不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	15~30件/分钟 (与产品尺寸有关)
<b>适用产品尺寸</b> Applicable Product Dimensions	长度: 20mm~200mm 宽度: 20mm~150mm 厚度: 0.2mm~120mm
<b>适用标签尺寸</b> Applicable Label Size	长度: 20mm~100mm 底纸宽度: 25mm~160mm
<b>整机尺寸</b> Device Dimensions	约840mm×440mm×840mm (长×宽×高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约48Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ280mm

贴标机行业领跑 一站式智能贴标机及自动化解决方案

Labeling Machine Industry Leader

One Stop Intelligent Labeling Machine & Automation Solutions

## 半自动前后滚贴贴标机

(型号-T803)

Semi-Automatic Front and Back Rolling Labeling Machine  
Model -T803



| 适用产品 | Applicable Products



| 基本用途 |  
Basic Use

适用于在产品的上平面、弧面、凹面贴标，贴标精度高达 $\pm 0.5\text{mm}$ ，主要用于电子元件、数码类产品的精密贴标，如玩具、SD卡、手机电池、FPC、手机充电器贴标等。高精度贴标，凸现产品优秀品质，提高竞争力。

Suitable for labeling on the top plane, arc surface and concave surface of products, labeling accuracy is up to  $\pm 0.5\text{mm}$ , mainly used for precision labeling of electronic and digital products, such as toys, SD card, mobile phone battery, FPC, mobile phone charger labeling, etc. High precision labeling manifest excellent quality product and greatly improve products competitiveness.

技术参数 Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
贴标精度 Labeling Accuracy	$\pm 0.5\text{mm}$ (不含产品、标签误差)
贴标速度 Labeling Speed	15~30件/分钟 (与产品尺寸有关)
适用产品尺寸 Applicable Product Dimensions	长度: 20mm~120mm 宽度: 20mm~180mm 厚度: 0.2mm~75mm
适用标签尺寸 Applicable Label Size	长度: 15mm~300mm 底纸宽度: 25mm~155mm
整机尺寸 Device Dimensions	约995mm×432mm×966mm (长×宽×高)
适用电源 Applicable Power Supply	220V/50HZ
整机重量 Weight	约58Kg
适用标签内径 Applicable Label Roll Inner Diameter	$\phi 76\text{mm}$
适用标签外径 Applicable Label Roll Outer Diameter	$\phi 280\text{mm}$
气压 Air pressure	0.4~0.6Mpa



# 半自动全周贴标机【360°】 (型号-T805)

Semi-Automatic 360° Wrap Around Labeling Machine  
Model -T805



## 适用产品 | Applicable Products



## 基本用途 | Basic Use

应用滚贴方法贴标, 实现在各种工件的平面上贴标, 如化妆品扁瓶、方瓶、六角瓶、棱形瓶贴标等。更改覆标机构, 可适用于不平整面贴标, 如棱形面、圆弧面的贴标等。更改治具, 可适用于各种不规则工件的贴标。

选配色带打码机或喷码机, 在标签上打印生产日期和批号, 实现打码-贴标一体化。

应用实例: 棱形瓶贴标, 六角瓶贴标, 异形瓶、塑胶壳贴标

Apply 360° rolling labeling method, to achieve on the plane of various workpieces labeling, such as cosmetics flat bottles, square bottles, hexagonal bottles, prismatic bottles labeling etc.

modifying the labeling head, can be used for labeling on uneven surface, such as prism surface, arc surface labeling etc. Mould is customized to suit for various irregular workpieces labeling.

Optional ribbon coding machine and hot stamp printer, can be added to the labeler head, can print MFG, EXP and LOT on labels at the same time while labeling.

技术参数 Technical Parameters	(以下为标准机型技术参数, 其他特殊要求和功能, 可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
贴标精度 Labeling Accuracy	±0.5mm (不含产品、标签误差)
贴标速度 Labeling Speed	15~30件/分钟 (与产品尺寸有关)
适用产品尺寸 Applicable Product Dimensions	长度: 20mm~200mm 宽度: 20mm~180mm 厚度: 5mm~130mm
适用标签尺寸 Applicable Label Size	长度: 15mm~300mm 宽度(底纸宽度): 25mm~160mm
整机尺寸 Device Dimensions	约843mm×759mm×895mm (长×宽×高)
适用电源 Applicable Power Supply	220V/50HZ
整机重量 Weight	约57Kg
适用标签内径 Applicable Label Roll Inner Diameter	φ76mm
适用标签外径 Applicable Label Roll Outer Diameter	φ280mm

# 半自动双侧面贴标机 (型号T806)

## Semi-Automatic Double Sides Labeling Machine Model -T806



### 适用产品 | Applicable Products



**基本用途 | Basic Use** 应用滚贴方法贴标, 实现在各种工件的侧面上贴标, 如化妆品扁瓶、包装盒、塑料侧面贴标等。更改覆标机构, 可适用于不平整面贴标, 如凹平面、圆弧面的贴标等。

更改治具, 可适用于各种不规则工件的贴标。选配色带打码机或喷码机, 在标签上打印生产日期和批号, 实现打码-贴标一体化。

Apply rolling labeling method, to achieve on the side of various workpieces labeling, such as cosmetic flat bottles, packaging boxes, plastic side labeling etc.

modifying the labeling head, can be used for labeling on uneven surface, such as concave plane, circular surface labeling etc.

Mould is customized to suit for various irregular workpieces labeling.

Optional ribbon coding machine and hot stamp printer, can be added to the labeler head, can print MFG, EXP and LOT on labels at the same time while labeling.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数, 其他特殊要求和功能, 可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	±0.5mm (不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	15~30件/分钟 (与产品尺寸有关)
<b>适用产品尺寸</b> Applicable Product Dimensions	长度: 50mm~350mm 宽度: 20mm~200mm 高度: 50mm~400mm
<b>适用标签尺寸</b> Applicable Label Size	长度: 15mm~300mm 底纸宽度: 25mm~175mm
<b>整机尺寸</b> Device Dimensions	约1328mm×1049mm×1516mm (长×宽×高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约270Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ280mm

## 半自动高精度贴标机 (型号:T807)

### Semi-Automatic High-Precision Labeling Machine Model -T807



#### 适用产品 | Applicable Products



**基本用途 | Basic Use** 适用于在产品的上平面、弧面、凹面贴标，贴标精度高达 $\pm 0.2\text{mm}$ ，主要用于电子元件、数码类产品的精密贴标，如SD卡、手机电池、FPC、手机充电器贴标等。高精度贴标，凸现产品优秀品质，提高竞争力。

Suitable for labeling on the top plane, arc surface and concave surface of products, labeling accuracy is up to  $\pm 0.2\text{mm}$ , mainly used for precision labeling of electronic and digital products, such as SD card, mobile phone battery, FPC, mobile phone charger labeling, etc. High precision labeling manifest excellent quality product and greatly improve products competitiveness.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	$\pm 0.2\text{mm}$ (不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	15~20件/分钟 (与产品尺寸有关)
<b>适用产品尺寸</b> Applicable Product Dimensions	长度: 10mm~300mm 宽度: 20mm~300mm 高度: 5mm~85mm
<b>适用标签尺寸</b> Applicable Label Size	长度: 10mm~50mm 宽度(底纸宽度): 25mm~100mm
<b>整机尺寸</b> Device Dimensions	约575mm×427mm×815mm (长×宽×高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约45Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	$\phi 76\text{mm}$
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	$\phi 240\text{mm}$

# 全自动搓滚式圆瓶贴标机 (型号:T821)

## Full Automatic Wrap Around Round Bottle Labeling Machine Model T821



### | 适用产品 | Applicable Products



### | 基本用途 | Basic Use

适用于饮料、制药、食品、日化等行业的圆瓶贴标，可贴半圆周贴标。

可选配自动转盘理瓶机，可直接连接前端生产线，自动送瓶进入贴标机，增加效率。可选配配置色带打码贴标机，可在线打印生产日期和批号，减少瓶子包装工序，提高生产效益。可增加喷码机，可在线将内容喷在标签或产品上，减少瓶子包装工序，提高生产效益。

Suitable for beverage, pharmaceutical, food and daily chemical industries etc round bottle labeling, Can achieve wrap around labeling.

Optional automatic feeding unscrambler, can directly connected to the front production line, automatic feeding bottle into the labeling machine to increase efficiency.

Optional ribbon coding machine and hot stamp printer, can be added to the labeler head, can print MFG, EXP and LOT on labels at the same time while labeling, reduce bottle packaging processes, greatly improve production efficiency. Can add inkjet printer to spray printing content on products and labels reduce bottle packaging processes, greatly improve production efficiency.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	±1.0mm(不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	40-120 件/分钟 (与产品尺寸有关)
<b>适用产品直径</b> Applicable for product diameter	φ20mm-φ100mm
<b>适用标签尺寸</b> Applicable Label Size	长度: 20mm~300mm; 宽度: 20mm~95mm
<b>整机尺寸</b> Device Dimensions	约2130mm×1150mm×1260 (长×宽×高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约213Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ280mm

# 全自动立式定位圆瓶贴标机 (型号-T822)

Full Automatic Vertical Positioning Round Bottle Labeling Machine (Cylinder Type)  
Model -T822



## 适用产品 | Applicable Products



### 基本用途 | Basic Use

适用于在圆瓶类物体圆周边贴标签，可贴单标和双标，正背双标间距可灵活调整，如啫喱水圆瓶、食品圆罐等贴标，广泛应用于化妆品、食品、医药、消毒水等行业。

选配圆周定位检测装置，可实现在圆周边指定位置贴标。可选配色带打码机和喷码机，实现在标签上打印生产日期和批号信息，实现贴标-赋码一体化。

Suitable for surface of the round bottle labeling, Can do single label and double labels, Also the labeling position can be adjusted easily between front and back labels, widely used in cosmetics, food, medicine, disinfectant and other industries.

Optional positioning detection function by which you can label to specified location in the circumferential surface.

Optional ribbon coding machine and hot stamp printer can be added to the labeler head, can print MFG, EXP and LOT on labels at the same time while labeling.

技术参数 Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
贴标精度 Labeling Accuracy	±1.0mm(不含产品、标签误差)
贴标速度 Labeling Speed	步进: 25~45pcs/min
适用产品直径 Applicable for product diameter	(针对圆瓶)及高度: 直径: φ20mm~φ100mm 高度: 25mm~300mm
适用标签尺寸 Applicable Label Size	长度: 20mm~300mm 宽度: 25mm~175mm
整机尺寸 Device Dimensions	2230mm×1085mm×1405mm (长×宽×高)
适用电源 Applicable Power Supply	220V/50HZ
整机重量 Weight	约222Kg
功率 Power	570W (牵引步进)
气压 Air Pressure	0.4~0.6Mpa
适用标签内径 Applicable Label Roll Inner Diameter	φ76mm
适用标签外径 Applicable Label Roll Outer Diameter	φ280mm

# 全自动卧式圆瓶贴标机 (型号-T823)

## Full Automatic Horizontal Round Bottle Labeling Machine Model T823



### 适用产品 | Applicable Products



### 基本用途 | Basic Use

适用于站立不稳的圆柱形物体圆周、半圆周的贴标，采用卧式传送、卧式贴标的方式，增加稳定性，提高贴标效率。  
可选配打码机或喷码机到贴标头，可实现在标签上打印生产日期、批号和喷印条码等信息。  
可选配喷码机到输送带，可实现贴标前或贴标后在产品上喷印生产日期、批号、条码等信息。

Suitable for wrap around labeling on cylindrical object that can not stand up, horizontally conveying and labeling improve stability and labeling efficiency.


Optional ribbon coding machine and hot stamp printer or inkjet printer, can be added to the labeler head, can print MFG, EXP, LOT and Barcode on labels at the same time while labeling.

Optional inkjet printer to the conveyor belt to spray printing MFG, EXP, LOT and Barcode on products at before or after labeling.

技术参数 Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
贴标精度 Labeling Accuracy	±1mm (不含产品、标签误差)
贴标速度 Labeling Speed	100-300件/分钟 (与产品尺寸有关)
适用产品直径 Applicable for product diameter	φ10mm ~ φ30mm (其他尺寸可定制)
适用标签尺寸 Applicable Label Size	长度: 20mm ~ 300mm 底纸宽度: 20mm ~ 120mm
整机尺寸 Device Dimensions	约2020mm × 735mm × 1425mm (长 × 宽 × 高)
适用电源 Applicable Power Supply	220V/50HZ
整机重量 Weight	约220Kg
适用标签内径 Applicable Label Roll Inner Diameter	φ76mm
适用标签外径 Applicable Label Roll Outer Diameter	φ280mm

# 全自动平面贴标机 (型号 T831)

## Full Automatic Plane Labeling Machine Model -T831

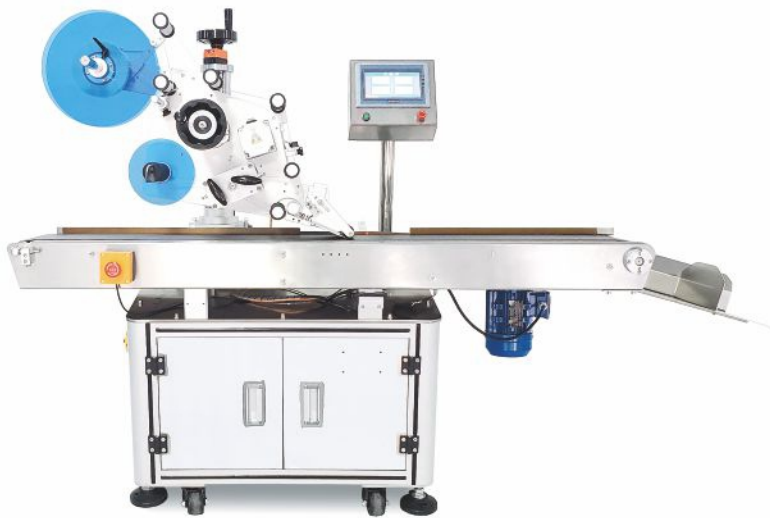

### 适用产品 | Applicable Products



### 基本用途 | Basic Use

适用于在各种物品的上平面贴标签或不干胶膜,如书本、文件夹、盒子、纸箱等,更换覆标机构。可适用于不平整表面贴标,广泛应用于大件产品的平面贴标,规格范围大的平面类物体贴标。

可选配打码机或喷码机到贴标头,可实现在标签上打印生产日期、批号和喷印条码等信息。可选配喷码机到输送带,可实现贴标前或贴标后在产品上喷印生产日期、批号、条码等信息。

Suitable for on the plane of various products labeling and adhesive sticker film,such as book, folder, box, carton, etc.,modifying the labeling head,can be used for labeling on uneven surface,widely apply for the plane labeling of large and wide range of specifications products.

Optional ribbon coding machine and hot stamp printer or inkjet printer,can be added to the labeler head,can print MFG, EXP, LOT and Barcode on labels at the same time while labeling.

Optional inkjet printer to the conveyor belt to spray printing MFG, EXP, LOT and Barcode on products at before or after labeling.

技术参数 Technical Parameters	(以下为标准机型技术参数,其他特殊要求和功能,可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
贴标精度 Labeling Accuracy	±1mm (不含产品、标签误差)
贴标速度 Labeling Speed	40~80件/分钟 (与产品尺寸有关)
适用产品尺寸 Applicable Product Dimensions	长: 40mm~400mm 宽: 40mm~200mm 高: 0.5mm~150mm
适用标签尺寸 Applicable Label Size	长度: 6mm~300mm 底纸宽度: 25mm~175mm
整机尺寸 Device Dimensions	约1925mm×735mm×1360mm (长×宽×高)
适用电源 Applicable Power Supply	220V/50HZ
整机重量 Weight	约188.5Kg
适用标签内径 Applicable Label Roll Inner Diameter	φ76mm
适用标签外径 Applicable Label Roll Outer Diameter	φ280mm

# 全自动分页贴标机 (型号:T832)

## Full Automatic Page Labeling Machine Model T832



### 适用产品 | Applicable Products




**基本用途 | Basic Use** 适用于各类卡片/小纸盒/刮刮卡/PE袋表面贴标签，贴标精度高，无气泡。  
Suitable for all kinds of cards / small cartons / scratch cards / PE bags labeling with high precision and no bubbles.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	±1mm (不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	40 ~ 120件/分钟 (与产品尺寸有关)
<b>适用产品尺寸</b> Applicable Product Dimensions	长: 40mm ~ 300mm 宽: 40mm ~ 200mm 高: 0.2mm ~ 5mm
<b>适用标签尺寸</b> Applicable Label Size	长度: 6mm ~ 300mm 宽度 (底纸宽度): 25mm ~ 175mm
<b>整机尺寸</b> Device Dimensions	约2445mm × 735mm × 1360 (长 × 宽 × 高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约224Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ 76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ 280mm

# 全自动封口转角贴标机 (型号:T833)

## Full Automatic Sealing Corner Labeling Machine Model -T833

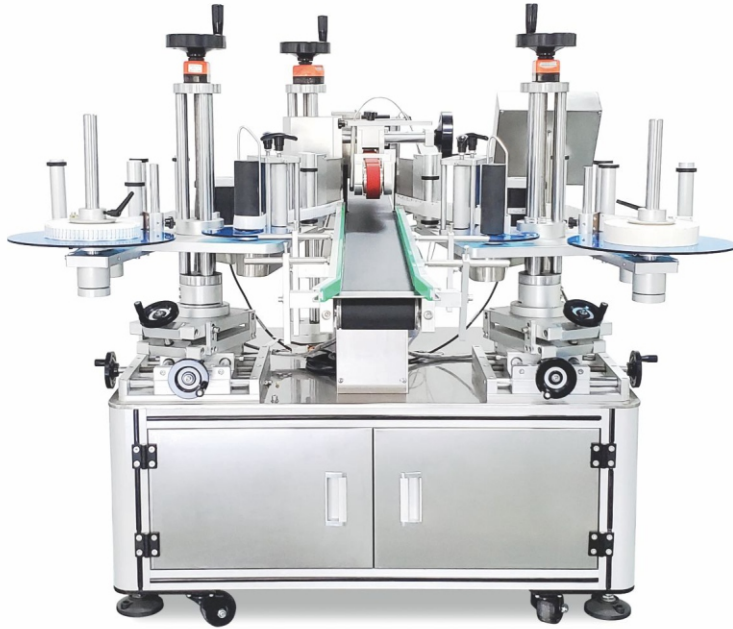

### | 适用产品 | Applicable Products



**| 基本用途 |** 专用于盒子转角贴标签，在盒子上平面与侧平面转角贴标，起到防拆开作用。主要应用于扑克、电子产品包装盒的防拆标签贴标。

Basic Use

Used for labeling on the corner of the box ,corner labeling on box upper plane and side,The purpose is preventing disassembly,mainly apply for poker, electronic products packaging box preventing disassembly labeling.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	±1.0mm(不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	30~60件/分钟(与产品尺寸有关)
<b>适用产品尺寸</b> Applicable Product Dimensions	长: 20mm~300mm 宽: 20mm~300mm 高: 10mm~100mm
<b>适用标签尺寸</b> Applicable Label Size	长度: 6mm~300mm 宽度(底纸宽度): 15mm~125mm
<b>整机尺寸</b> Device Dimensions	约1975mm×1295mm×1240(长×宽×高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约180Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ280mm

# 全自动平面流水线贴标头 (型号-T851)

## Full Automatic Plane Production Line Labeling Head Model -T851



### 适用产品 | Applicable Products



**基本用途 | Basic Use** 可配套到车间流水线, 对流过的产品, 进行上平面、侧面的贴标, 实现在线贴标, 如配套喷码机, 对流过的物体实现贴标、喷码一步完成。  
Can be matched to the assembly line, labeling on upper plane and side when products pass, can achieve online labeling, such as matching inkjet machine together, for passing products to achieve labeling and spraying printing at the same time.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数, 其他特殊要求和功能, 可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	± 1.0mm(不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	40 ~ 120件/分钟 (与产品尺寸有关)
<b>适用产品尺寸</b> Applicable Product Dimensions	10mm ~ 150mm
<b>适用标签尺寸</b> Applicable Label Size	长度: 6mm ~ 300mm 底纸宽度: 25mm ~ 125mm
<b>整机尺寸</b> Device Dimensions	约885mm × 870mm × 1535mm (长 × 宽 × 高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约76Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ 76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ 280mm

# 全自动侧面流水线贴标头 (型号:T852)

## Full Automatic Side Production Line Labeling Head Model -T852



### | 适用产品 | Applicable Products




**| 基本用途 |** Basic Use 可配套到流水线,对流过的产品进行侧面贴标,实现在线贴标,如配套到喷码输送带,对流过的物品贴标。  
Can be matched to the assembly line, labeling on products of side when products pass, can achieve online labeling, such as matching to inkjet machine conveyor belt, for passing products to achieve labeling.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数,其他特殊要求和功能,可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	±1.0mm(不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	步进: 40~150pcs/min 伺服: 50~200pcs/min
<b>适用产品尺寸</b> Applicable Product Dimensions	无要求(取决于流水线输送参数)
<b>适用标签尺寸</b> Applicable Label Size	长度: 6mm~300mm 底纸宽度: 25mm~125mm
<b>整机尺寸</b> Device Dimensions	约795mm×645mm×1265mm(长×宽×高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约70Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ280mm

# 全自动龙门架贴标头 (型号-T853)

Full Automatic Gantry Stand Labeling Head  
Model -T853

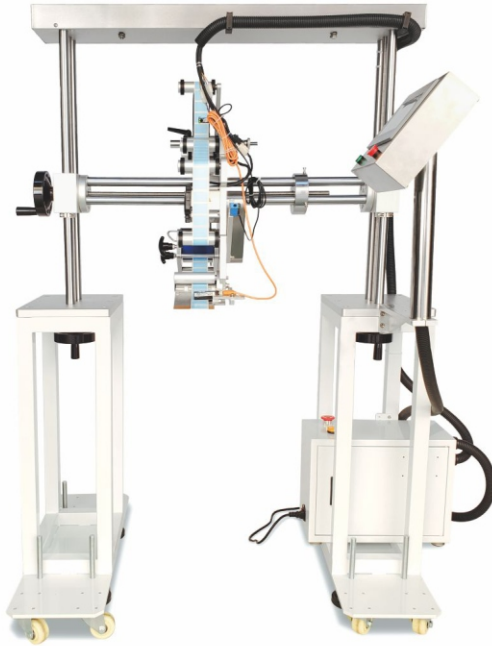

## | 适用产品 | Applicable Products



**| 基本用途 |** 可配套到流水线, 对流过的产品, 进行上平面、弧面的贴标, 实现在线无人化贴标如配套到喷码输送带, 对流过的物体贴标。  
Basic Use Can be matched to the assembly line, labeling on upper plane and arc surface when products pass, To achieve automation labeling, such as matching to inkjet machine conveyor belt, for passing products to achieve labeling.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数, 其他特殊要求和功能, 可量身订做) The following are the technical parameters of the standard model, If have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	±1.0mm(不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	步进: 40~150pcs/min 伺服: 50~200pcs/min
<b>适用产品尺寸</b> Applicable Product Dimensions	无要求(取决于流水线输送参数)
<b>适用标签尺寸</b> Applicable Label Size	长度: 6mm~300mm 底纸宽度: 25mm~125mm
<b>整机尺寸</b> Device Dimensions	约1230mm×797mm×845mm(长×宽×高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约66Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ280mm

# 全自动单侧面贴标机 (型号-T961)

## Full Automatic Single Side Labeling Machine Model -T961



### 适用产品 | Applicable Products




**基本用途 | Basic Use** 适用于扁瓶、圆瓶、方瓶的单面贴标，如洗发水扁瓶，润滑油扁瓶，洗手液圆瓶等单侧面贴标，广泛应用于日化、化妆品、石化、医药等行业。  
Suitable for single side labeling of flat bottle, round bottle and square bottle, such as shampoo flat bottle, lubricating oil flat bottle, hand sanitizer round bottle etc single side labeling, Widely used in daily chemical, cosmetics, petrochemical, medicine industries etc.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	±1.0mm(不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	步进: 30~160pcs/min 伺服: 50~200pcs/min
<b>适用产品尺寸</b> Applicable Product Dimensions	长度(输送方向): 20mm~250mm 宽度(输送宽度方向): 30mm~90mm 高度: 60mm~350mm
<b>适用标签尺寸</b> Applicable Label Size	长度: 20mm~300mm 宽度: 25mm~175mm
<b>整机尺寸</b> Device Dimensions	3070mm×1050mm×1565mm (长×宽×高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约330Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ280mm

# 全自动双侧面贴标机 (型号-T962)

## Full Automatic Double Sides Labeling Machine Model -T962

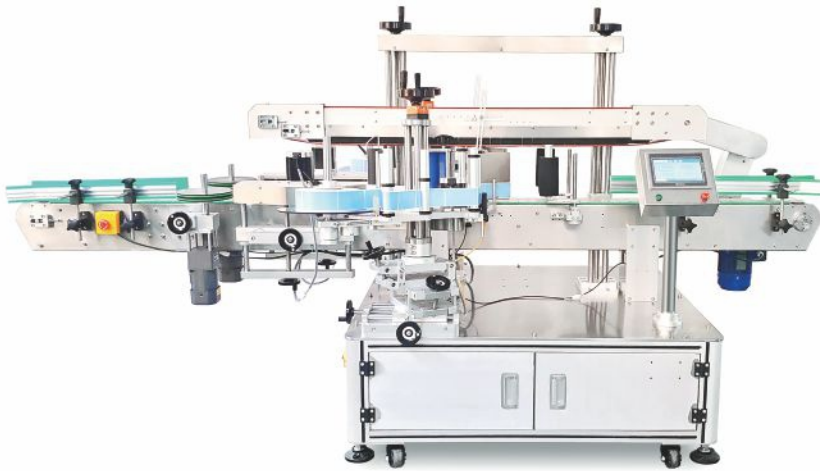

### 适用产品 | Applicable Products



**基本用途 | Basic Use** 适用于扁瓶、圆瓶、方瓶的单面和双侧面贴标，如洗发水扁瓶，润滑油扁瓶，洗手液圆瓶等双侧面贴标，两面同贴，双标提高生产效率，广泛应用于日化、化妆品、石化、医药等行业。

Suitable for single side and double sides labeling of flat bottle, round bottle and square bottle, such as shampoo flat bottle, lubricating oil flat bottle, hand sanitizer round bottle etc double sides labeling, both double sides labeling at the same time, greatly improve production efficiency, Widely used in daily chemical, cosmetics, petrochemical, medicine industries etc.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	±1.0mm(不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	步进: 30~160pcs/min 伺服: 50~200pcs/min
<b>适用产品尺寸</b> Applicable Product Dimensions	长度(输送方向): 20mm~250mm 宽度(输送宽度方向): 30mm~90mm 高度: 60mm~280mm
<b>适用标签尺寸</b> Applicable Label Size	长度: 20mm~300mm 宽度: 25mm~175mm
<b>整机尺寸</b> Device Dimensions	3070mm×1410mm×1565mm (长×宽×高)
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约473Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ280mm

贴标机行业领跑 一站式智能贴标机及自动化解决方案


Labeling Machine Industry Leader

One Stop Intelligent Labeling Machine & Automation Solutions

# 全自动圆瓶扁瓶一体机

(型号·T963)

Full Automatic Round Bottle & Flat Bottle All In One Machine  
Model -T963

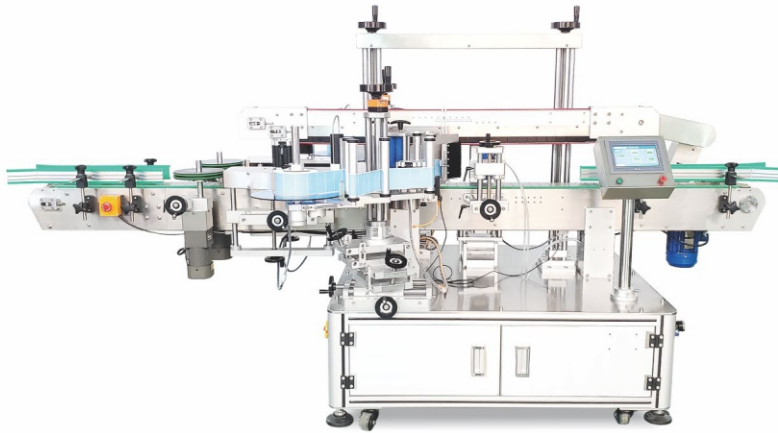

## 适用产品 | Applicable Products



**基本用途 | Basic Use** 适用于扁瓶、圆瓶、方瓶的单面和双侧面贴标，如洗发水扁瓶，润滑油扁瓶，洗手液圆瓶等双侧面贴标，两面同贴，双标提高生产效率，广泛应用于日化、化妆品、石化、医药等行业。

Suitable for single side and double sides labeling of flat bottle, round bottle and square bottle, such as shampoo flat bottle, lubricating oil flat bottle, hand sanitizer round bottle etc double sides labeling, both double sides labeling at the same time, greatly improve production efficiency, widely used in daily chemical, cosmetics, petrochemical, medicine industries etc.

技术参数 Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
贴标精度 Labeling Accuracy	±1.0mm(不含产品、标签误差)
贴标速度 Labeling Speed	30~120件/分钟(与产品尺寸有关)
适用产品尺寸 Applicable Product Dimensions	长20mm~250mm 宽30mm~90mm 高: 60mm~280mm
适用标签尺寸 Applicable Label Size	长度: 20mm~300mm 底纸宽度: 20mm~175mm
适用产品直径 Labeling Speed	20mm~120mm
整机尺寸 Device Dimensions	约3070mm×1410mm×1565mm(长×宽×高)
适用电源 Applicable Power Supply	220V/50HZ
整机重量 Weight	约500Kg
适用标签内径 Applicable Label Roll Inner Diameter	φ76mm
适用标签外径 Applicable Label Roll Outer Diameter	φ280mm

贴标机行业领跑 一站式智能贴标机及自动化解决方案

Labeling Machine Industry Leader  
One Stop Intelligent Labeling Machine & Automation Solutions

## 在线打印贴标机【预存打印】

(型号-T965)

Online Printing Labeling Machine (Cache Printing)  
Model -T965



| 适用产品 | Applicable Products



| 基本用途 | Basic Use 适用于各种平面类产品的条码贴标, 可边打印条码, 边贴标; 配套包装产线, 可按客户需求量身定制。

Suitable for barcode labeling of all kinds of plane products, can print barcode and labeling at the same time, matching packaging production line, can be customized according to customer requirements.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数, 其他特殊要求和功能, 可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	±1.0mm(不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	40-120 件/分钟 (与产品、标签尺寸有关)
<b>适用电源</b> Applicable Power Supply	220V 50/60HZ
<b>功率</b> Power	1.8KW
<b>整机尺寸</b> Device Dimensions	约2825mm×1055mm×1480mm (长×宽×高)

# 全自动热熔胶单工位方瓶贴标机

(型号-R918)

Automatic Hot Melt Glue Single Station Square Bottle Labeling Machine  
Model -R918



## 适用产品 | Applicable Products



**基本用途 | Basic Use** 本机适用于矿泉水，饮料，乳业，食品，调味品等行业，实现涂胶、贴标，更换治具可兼容圆瓶、扁瓶等瓶型圆瓶类切标、贴标精度为±1mm。

This machine applies for mineral water, beverage, dairy, food, condiments industries and so on, Can realize cylindrical bottle cutting, glueing and labeling, change the fixture module to be compatible for cylindrical bottle, flat bottle etc;  
The labeling accuracy is ±1mm.

技术参数 Technical Parameters	(以下为标准机型技术参数，其他要求和功能，可定制) The following are the technical parameters of the standard model, other requirements and functions, which can be customized
贴标精度 Labeling Accuracy	±1.0mm
贴标速度 Labeling Speed	30瓶/分钟 (视瓶子大小和标签长度而定)
适用产品规格 Applicable product specifications	方瓶、大圆瓶、椭圆瓶等
适用标签尺寸 Applicable Label Size	□□□□>50mm(L)
整机尺寸 Device Dimensions	约4650mm(L)X1650mm(W)X1650mm(H)
总功率 Aggregate capacity	6Kw
整机重量 Weight	约1500Kg
适用标签内径 Applicable Label Roll Inner Diameter	>φ152
适用标签外径 Applicable Label Roll Outer Diameter	< 600 mm
气压 Air pressure	5 Kg f/cm <sup>2</sup>

# 全自动热熔胶12工位圆瓶贴标机

(型号- R919)

Automatic Hot Melt Glue 12 Stations Round Bottle Labeling Machine  
Model -R919

## | 适用产品 | Applicable Products



**基本用途** | 本机适用于矿泉水，饮料，乳业，食品，调味品等行业，实现涂胶、贴标，更换治具可兼容圆瓶、扁瓶等瓶型圆瓶类切标、贴标精度为±1mm。  
Basic Use

This machine applies for mineral water, beverage, dairy, food, condiments industries and so on, Can realize cylindrical bottle cutting, glueing and labeling, change the fixture module to be compatible for cylindrical bottle, flat bottle etc;  
The labeling accuracy is ±1mm.

技术参数 Technical Parameters	(以下为标准机型技术参数，其他要求和功能，可定制) The following are the technical parameters of the standard model, other requirements and functions, which can be customized
贴标精度 Labeling Accuracy	±1.0mm(不含产品、标签误差)
贴标速度 Labeling Speed	200瓶/分钟 (视瓶子大小和标签长度而定)
适用产品规格 Applicable product specifications	圆瓶
适用标签尺寸 Applicable Label Size	□□□□>50mm(L)
整机尺寸 Device Dimensions	约1600mm(L)X1300mm(W)X2100 mm(H)
总功率 Aggregate capacity	6Kw
整机重量 Weight	约2000Kg
适用标签内径 Applicable Label Roll Inner Diameter	>ϕ152
适用标签外径 Applicable Label Roll Outer Diameter	< 600 mm
气压 Air pressure	5 Kg f/cm2

## 半自动装袋封口机 型号 (XLSM-01) Semi-automatic bagging and sealing machine Model XLSM-01



### | 适用产品 | Applicable Products



### | 基本用途 | Basic Use

适用于电子产品、医疗检测试纸、一次性牙刷、牙膏等日用品的装袋。封口温度根据实际需求进行调节。设备采用人机界面进行交互控制:所有机构均进行隐藏式设计,避免对操作人员造成作害。

Suitable for bagging daily necessities such as electronic products, medical test strips, disposable toothbrushes, toothpaste, etc. The sealing temperature is adjusted according to actual needs. The device adopts a human-machine interface for interactive control: all mechanisms are designed in a hidden manner to avoid harm to operators.

技术参数 Technical Parameters	(以下为标准机型技术参数, 其他要求和功能, 可定制) The following are the technical parameters of the standard model, other requirements and functions, which can be customized
封口精度 Sealing accuracy	小于2mm(产品尺寸稳定封口宽度可调)
作业效率 Work efficiency	设备周期小于2秒; 1500PCS/h
适用胶袋尺寸 Applicable bag size	宽45~80mm高95~185mm
作业高度 Working altitude	900mm
整机尺寸 Dimensions	宽1220mmX深680mmX高1200mm
电源 Power supply	AC220V 50/60Hz
整机重量 Machine weight	220Kg
电源 Power supply	400w
对接输送线高度 Docking conveyor line height	< 640 mm
气压 Air pressure	0.5MPa50L/min以上洁净的空气

# 全自动胶带贴标机


Fully automatic tape labeling machine

Model T830

型号 T830



## | 适用产品 | Applicable Products

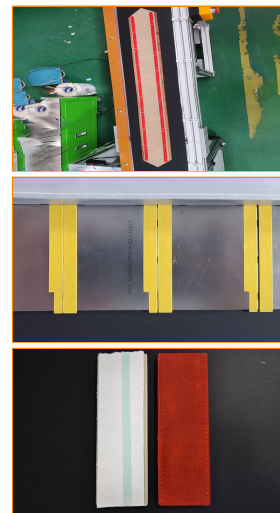

**| 基本用途 | Basic Use** 全自动胶带贴标机是一种自动把胶带切断粘贴到待贴产品指定位置上的自动化机械设备。适用胶带：双面胶、3M胶、泡棉胶、海绵胶、单面胶、布纹胶等（亚克力胶、无痕胶一般较难实现自动切断）。应用于塑胶制品、电子产品、纸制品、板材等产品自动粘贴胶带，可根据产品尺寸加长定做机器。

The fully automatic tape labeling machine is an automated mechanical equipment that automatically cuts and pastes the tape onto the designated position of the product to be pasted. Applicable tapes: double-sided tape, 3M tape, foam tape, sponge tape, single-sided tape, cloth pattern tape, etc. (acrylic tape, non marking tape are generally difficult to achieve automatic cutting). Applied to automatic tape pasting of plastic products, electronic products, paper products, boards and other products, boards, and other products. The machine can be customized according to the product size and extended.

技术参数 Technical Parameters	(以下为标准机型技术参数，其他要求和功能，可定制) The following are the technical parameters of the standard model, other requirements and functions, which can be customized
贴标精度 Labeling Accuracy	±1.0mm(不含产品、标签误差)
贴标速度 Labeling Speed	20~30件/分钟(与产品、标签尺寸有关)
适用产品尺寸 Applicable product size	长：40mm~400mm；宽：40mm~200mm；高：0.5mm~100mm
适用标签尺寸 Applicable Label Size	按胶带定做/Customized according to tape
整机尺寸 Machine size	约1600mm*700mm*1350mm(长×宽×高)
输出功率 Output power	1.75Kw
整机重量 Weight	150Kg
电源 Power supply	220V/50HZ
粘着剂 Adhesive	双面胶、透明胶/Double sided adhesive, transparent adhesive



# 全自动纸箱贴标机

## Full Automatic Carton Box Labeling Machine



### | 全自动单标头纸箱贴标机 |

Full Automatic Single Head Carton Box Labeling Machine



### | 全自动双标头纸箱贴标机 |

Full Automatic Double Heads Carton Box Labeling Machine



### | 全自动三标头纸箱贴标机 |

Full Automatic Three Heads Carton Box Labeling Machine

**| 基本用途 |** 针对纸箱类贴标研发机型，适用于在各种纸箱的上平面或下平面贴标签或不干胶膜，可选配打码机或喷码机到贴标头，可实现在标签上打印生产日期、批号和喷印条码等信息。

Basic Use

Specially research and development labeling machine model for carton labeling, suitable for on the upper and under plane of various cartons labeling and adhesive sticker film. Optional ribbon coding machine and hot stamp printer or inkjet printer, can be added to the labeler head, can print MFG, EXP, LOT and Barcode on labels at the same time while labeling.

**| 工作过程 |** 核心工作原理：传感器检测到产品经过，传回信号到贴标控制系统，信号经过PLC处理后，在适当时刻送出标签贴附在产品设定位置上，产品流经覆标装置，标签被覆牢固，一张标签的贴附动作完成。

Working Process

操作过程：放产品（可接流水线）→产品输送（自动实现）→产品纠正（自动实现）→产品检测（自动实现）→贴标（自动实现）→覆标（自动实现）→收集已贴标产品。


core working principle: when the sensor detects the product passing, returned the signal to labeling control system, after the signal is processed by PLC, at the right time, the label is sent out and attached to the special position of the product, the products pass the strengthening device, the label is covered firmly, the attachment of a label is completed.

Operation process: product release (can be connected to assembly line) → product conveying (automation finished) → product correction (automation finished) → product detection (automation finished) → labeling (automation finished) → covering labeling → Collect labeled products.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, if have other special requirements and functions can be customized
<b>贴标精度</b> Labeling Accuracy	± 1.0mm(不含产品、标签误差)
<b>贴标速度</b> Labeling Speed	20 ~ 50件/分钟 (与产品尺寸有关)
<b>适用产品尺寸</b> Applicable Product Dimensions	按需定制
<b>适用标签尺寸</b> Applicable Label Size	长度: 6mm ~ 300mm 底纸宽度: 15mm ~ 125mm
<b>适用电源</b> Applicable Power Supply	220V/50HZ
<b>整机重量</b> Weight	约200Kg
<b>适用标签内径</b> Applicable Label Roll Inner Diameter	φ 76mm
<b>适用标签外径</b> Applicable Label Roll Outer Diameter	φ 280mm
<b>电压</b> Voltage	220V

# 全自动底部贴标机

## Full Automatic Bottom Labeling Machine

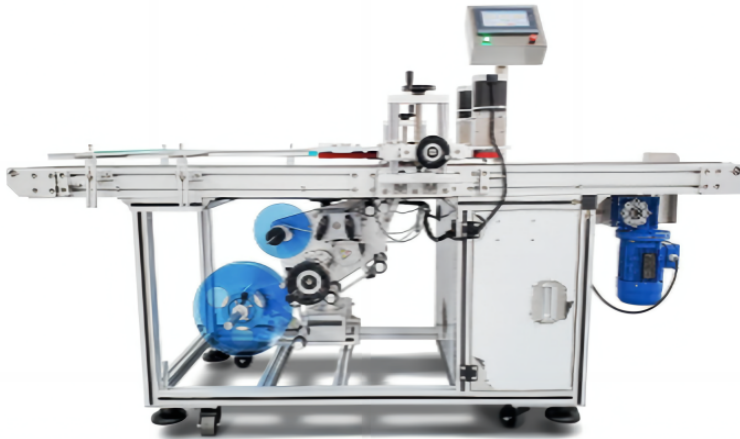

### 适用产品 | Applicable Products



### 基本用途 | Basic Use

针对产品底部（下平面）贴标研发机型，适用于在各种下平面贴标签或不干胶膜。

可选配打码机或喷码机到贴标头，可实现现在标签上打印生产日期、批号和喷印条码等信息。

Specially research and development labeling machine model for bottom or under plane of products labeling ,suitable for on various of the under plane labeling and adhesive sticker film.

Optional ribbon coding machine and hot stamp printer or inkjet printer,can be added to the labeler head,can print MFG, EXP, LOT and Barcode on labels at the same time while labeling.

### 工作过程 | Working Process

核心工作原理：传感器检测到产品经过，传回信号到贴标控制系统，信号经过PLC处理后，在适当时刻送出标签贴附在产品设定位置上，产品流经覆标装置，标签被覆牢固，一张标签的贴附动作完成。

操作过程：放产品（可接流水线）→产品输送（自动实现）→产品纠正（自动实现）→产品检测（自动实现）→贴标（自动实现）→覆标（自动实现）→收集已贴标产品。

core working principle:when the sensor detects the product passing,returned the signal to labeling control system,after the signal is processed by PLC,at the right time, the label is sent out and attached to the special position of the product,the products pass the strengthening device,the label is covered firmly,the attachment of a label is completed.

Operation process:product release (can be connected to assembly line)→product conveying (automation finished)→product correction (automation finished)→product detection (automation finished)→labeling(automation finished)→covering labeling→Collect labeled products.

<b>技术参数</b> Technical Parameters	(以下为标准机型技术参数，其他特殊要求和功能，可量身订做) The following are the technical parameters of the standard model, If have other special requirements and functions can be customized
贴标精度 Labeling Accuracy	±1.0mm(不含产品、标签误差)
贴标速度 Labeling Speed	20~50件/分钟(与产品尺寸有关)
适用产品尺寸 Applicable Product Dimensions	按需定制
适用标签尺寸 Applicable Label Size	长度: 6mm~300mm 底纸宽度: 15mm~125mm
整机尺寸 Device Dimensions	约2335mm×850mm×1310mm(长×宽×高)
适用电源 Applicable Power Supply	220V/50HZ
整机重量 Weight	约200Kg
适用标签内径 Applicable Label Roll Inner Diameter	φ76mm
适用标签外径 Applicable Label Roll Outer Diameter	φ280mm
电压 Voltage	220V




贴标机行业领跑 一站式智能贴标机及自动化解决方案

Labeling Machine Industry Leader

One Stop Intelligent Labeling Machine & Automation Solutions


## 其他机型

Other Tpye of Machines

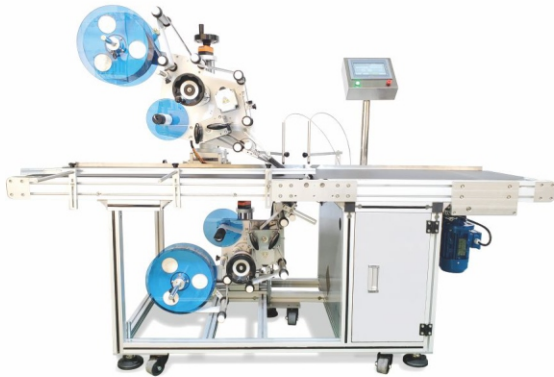


全自动上下面一体贴标机

Full-Automatic Upper And Lower One-Body Labeling Machine

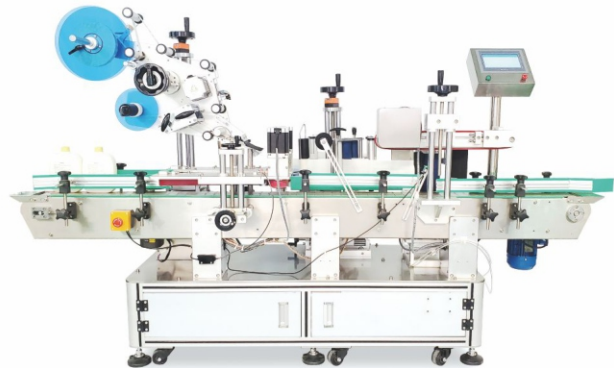

全自动平面侧面一体贴标机

Full-Automatic Plane And Side One-Body Labeling Machine

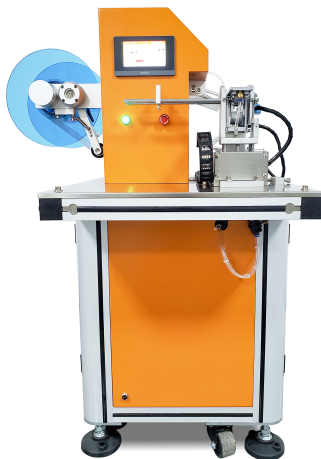

半自动对折贴标机

Semi-Automatic Wire Folding Labeling Machine



落地式圆瓶贴标机

Floor-mounted round bottle labeling machine

此设备为按需定制型机器，可以根据用户的需求非标定制，  
欢迎与我们联系，样品可以免费上机器试贴并拍视频给您看贴标过程及效果；

# Professional team 专业团队



专业的研发设计团队 满足用户的按需定制  
国内多家办事处 提供样品试贴及售前/售后服务

用户量达到  
**6000+**

Professional R & D and Design Team to satisfy our customers labeling requirements  
Domestic branch offices provide freely samples labeling and pre-sales / after-sales service  
**Customers up to 6000+**

